



Progetto subwoofer Tb speakers

Bass reflex: lunghezza del tubo 368 mm.
 Bass reflex: diametro del tubo 50 mm.
 Frequenza di accordo: 33 hz.



PA SERIES


W6-1139SC

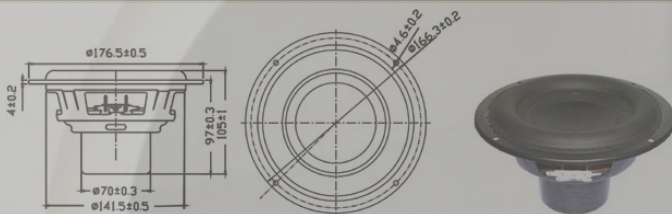

6.5" PAPER SUBWOOFER

- LONG-THROW HIGH-POWER LOADING DESIGN(X-max=11.5mm)
- PAPER CONE WITH BIG ROLL, SPECIAL LESS DAMPING, WIDE RANGE TEMPERATURE RUBBER SURROUND
- VENTED POLE PIECE ,NEODYMIUM MAGNET DESIGN
- STAMPING STEEL BASKET
- SUITABLE FOR SUBWOOFER APPLICATION
- MAGNETICALLY SHIELDED

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	83 dB
FREQUENCY RESPONSE	35-800 Hz
FREE AIR RESONANCE	35 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	60 W
MAXIMUM POWER INPUT	120 W
FORCE FACTOR, BL	8.48 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	39.4 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	526.3MN ⁻¹
EFFEC.PISTON AREA	0.0140m ²
Levc	0.98mH
Zo	24.04ohm
X-max	11.5 mm
Vas	14.65 Litr.
Qts	0.37
Qms	2.46
Qes	0.43



TB SPEAKERS

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
 VOICE#886 2 26570262 FAX#886 2 26580166